

FIG. 1A is a perspective view of a prior art device 10. The device 10 includes a housing 55 with a front face 56 and a rear face 57. A display 40 is mounted on the front face 56. A camera 46 is mounted on the front face 56. A microphone 47 is mounted on the front face 56. A speaker 48 is mounted on the front face 56. A battery 49 is mounted on the rear face 57. A port 58 is mounted on the rear face 57. A port 59 is mounted on the front face 56. A port 60 is mounted on the front face 56. A port 61 is mounted on the front face 56. A port 62 is mounted on the front face 56. A port 63 is mounted on the front face 56. A port 64 is mounted on the front face 56. A port 65 is mounted on the front face 56. A port 66 is mounted on the front face 56. A port 67 is mounted on the front face 56. A port 68 is mounted on the front face 56. A port 69 is mounted on the front face 56. A port 70 is mounted on the front face 56.

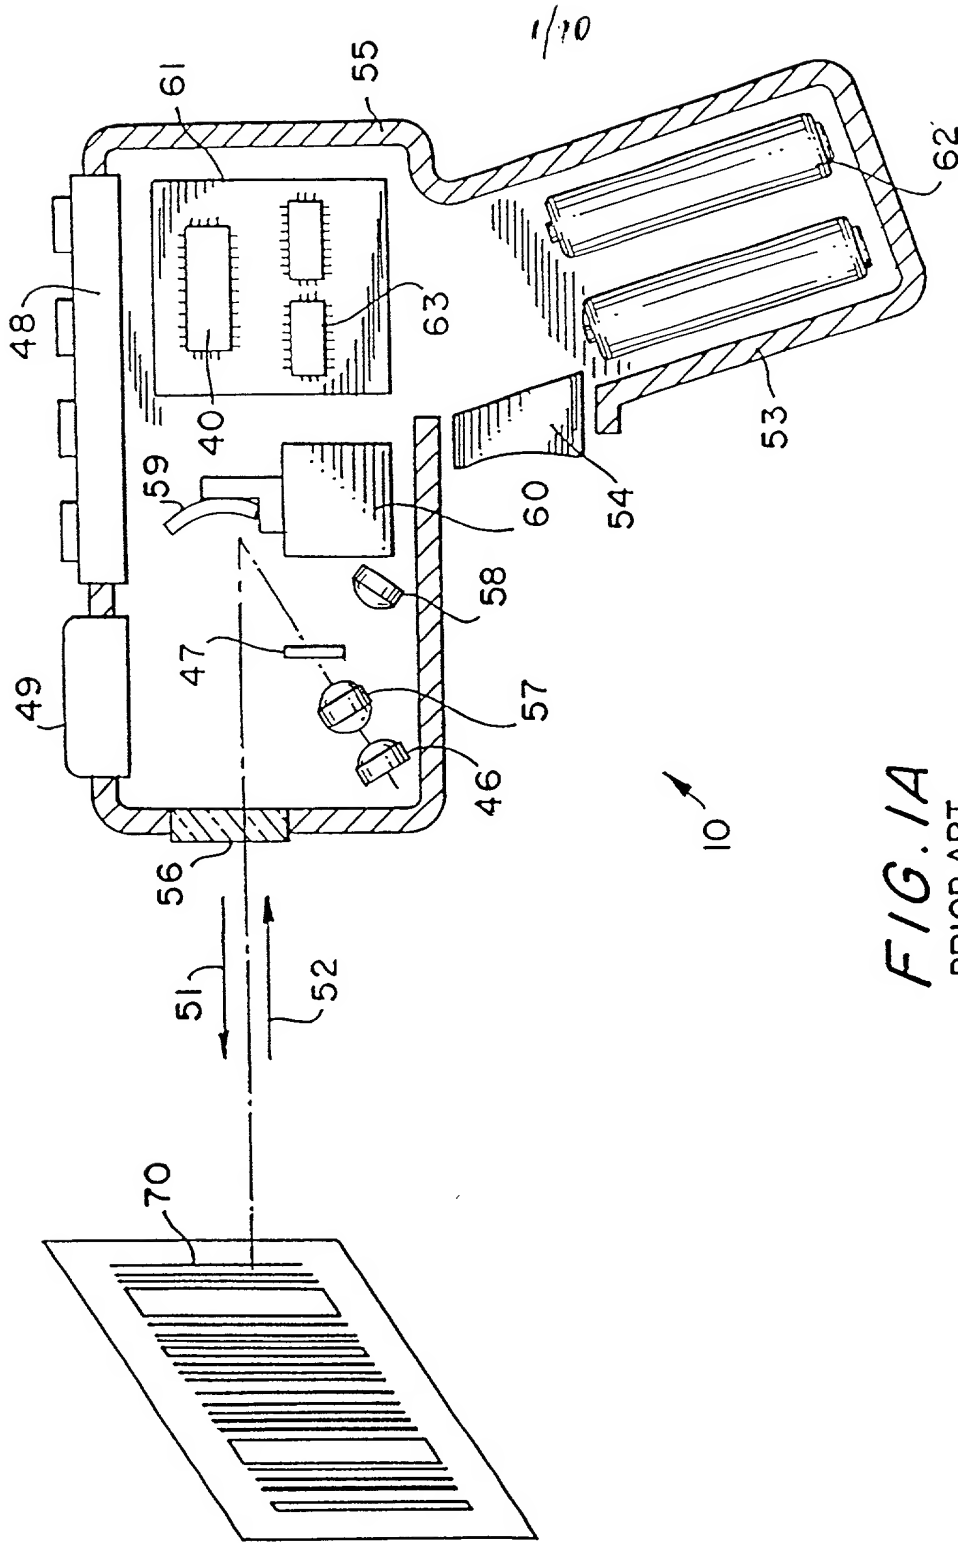


FIG. 1A
PRIOR ART

2/10

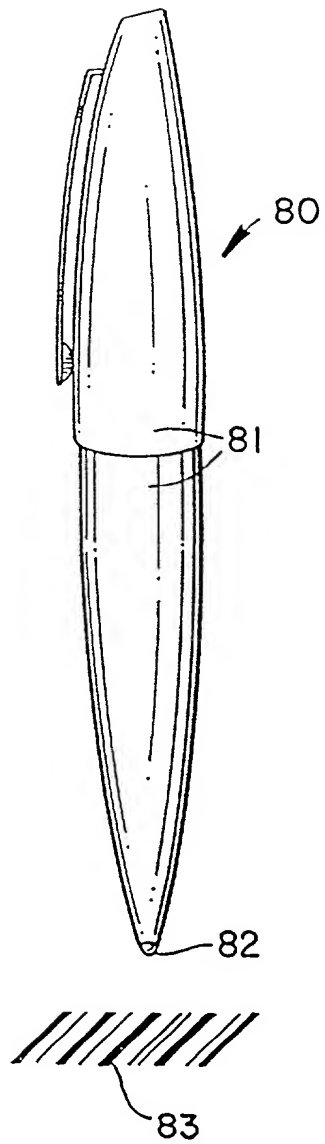


FIG. 1B

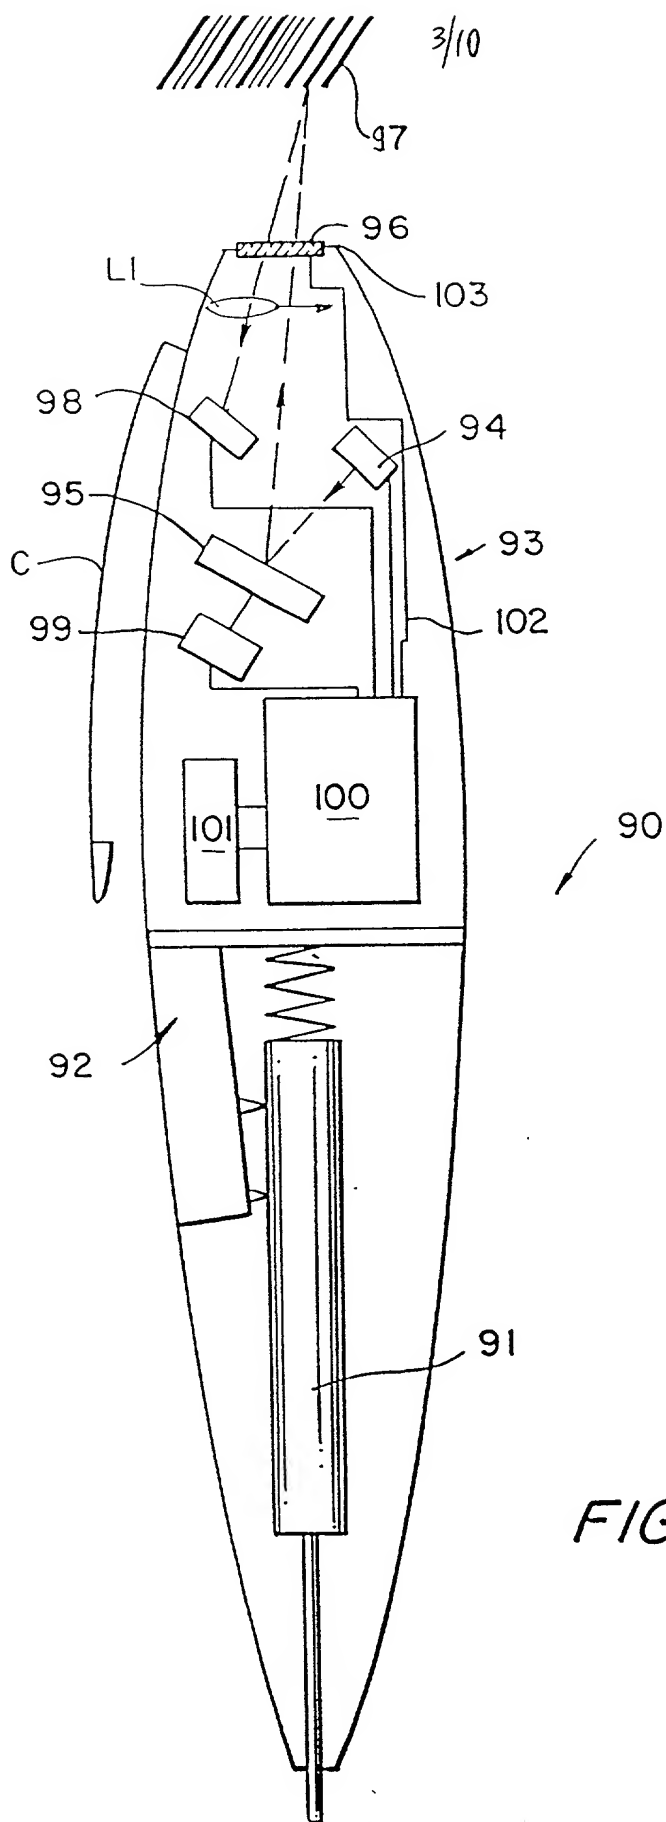


FIG. 2

4/10

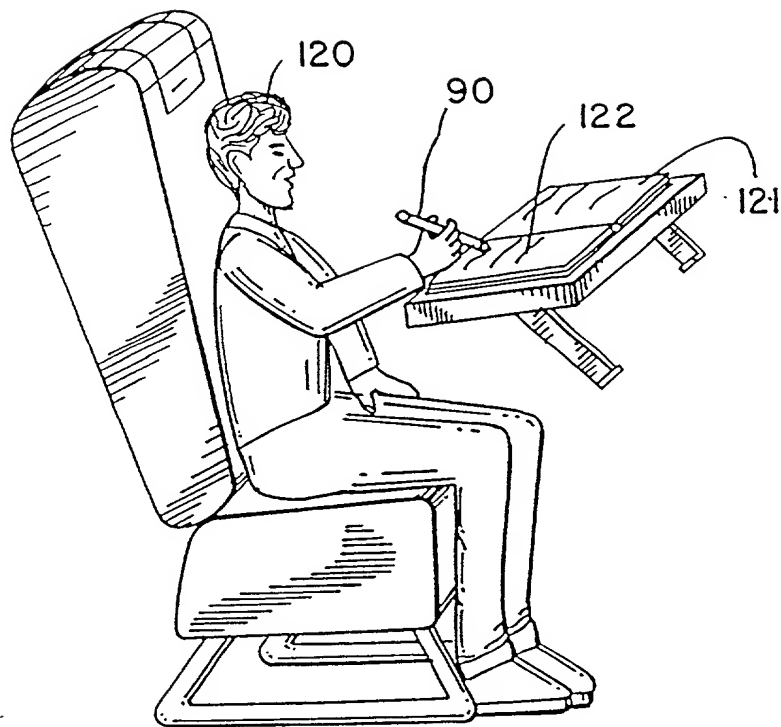


FIG.3

5/10







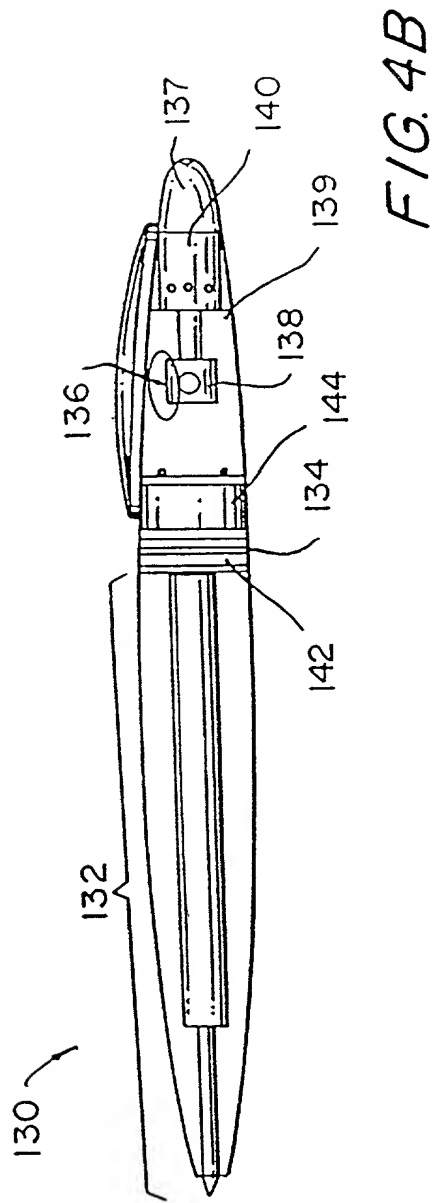


FIG. 5E

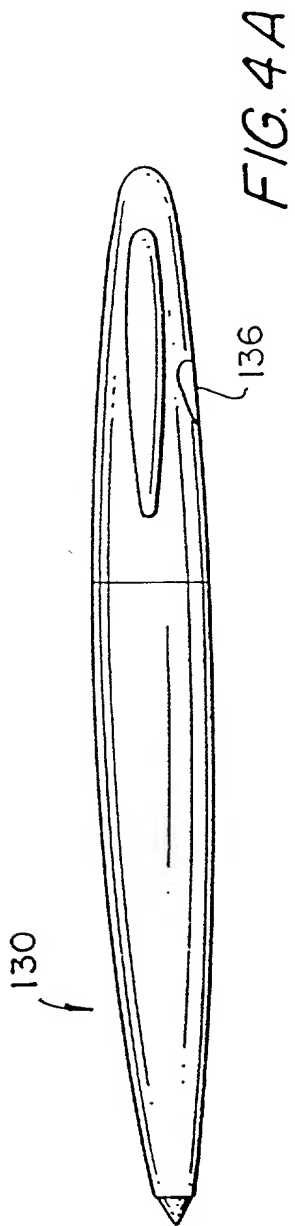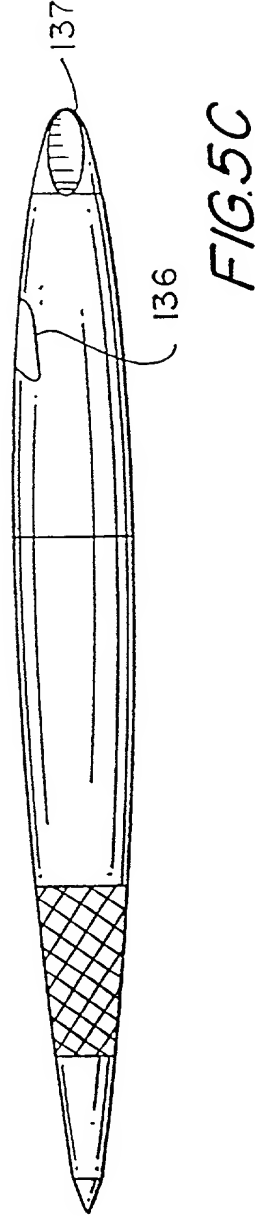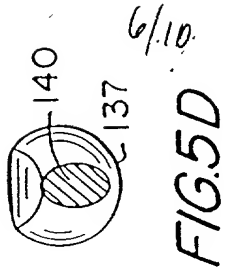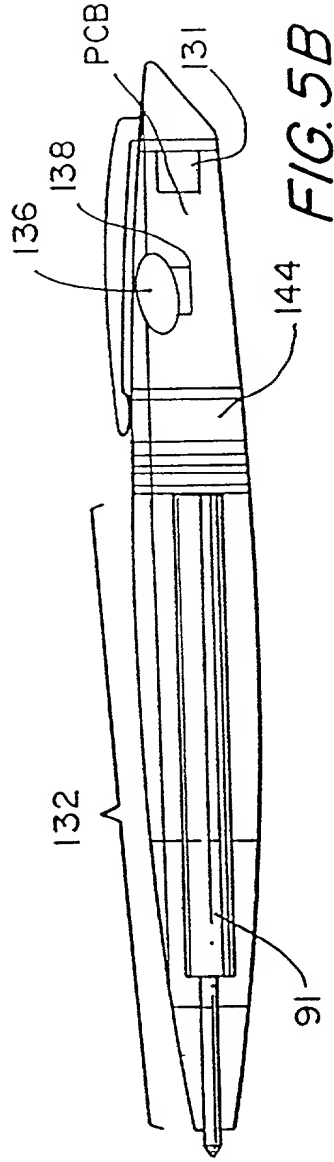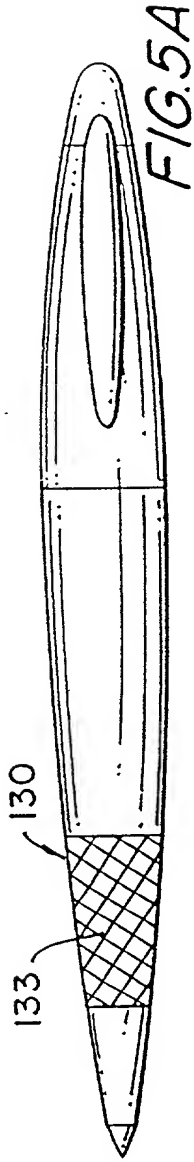

7/10

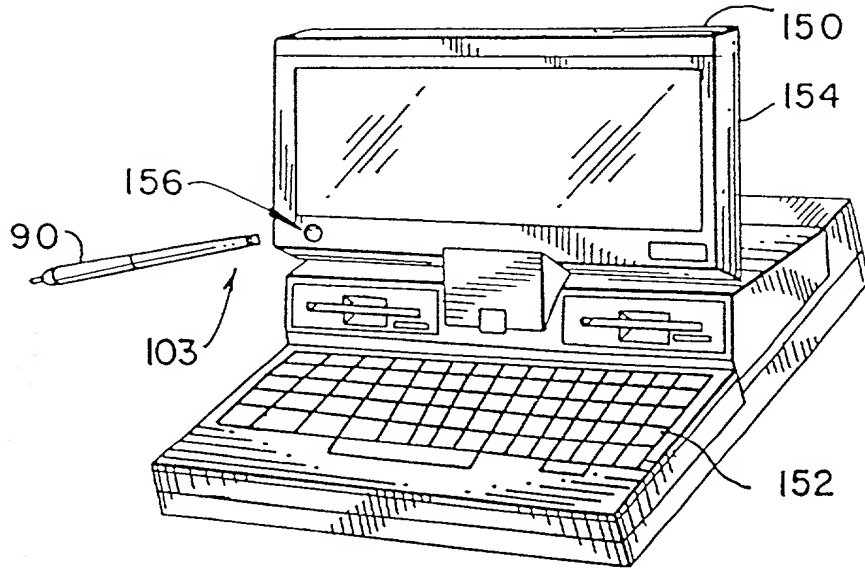


FIG. 6

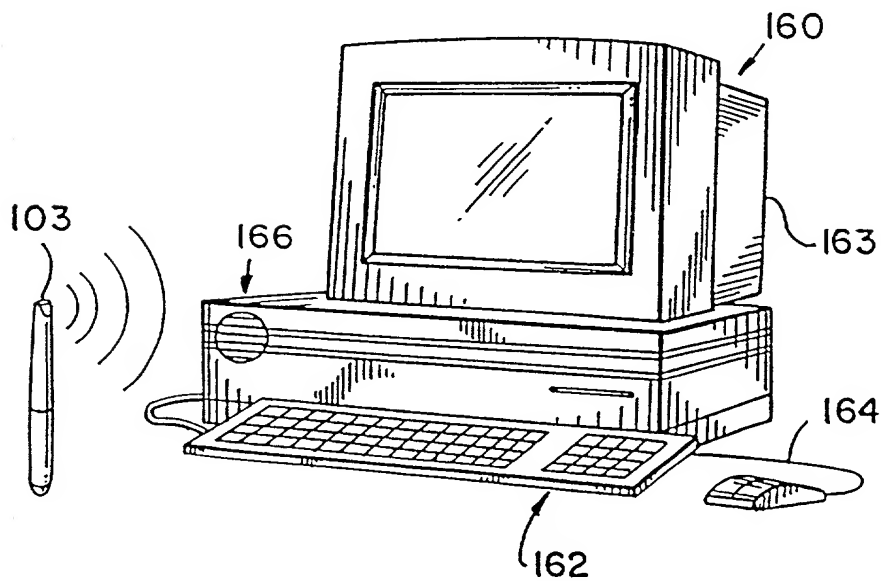


FIG. 7

8/10

FIG. 8




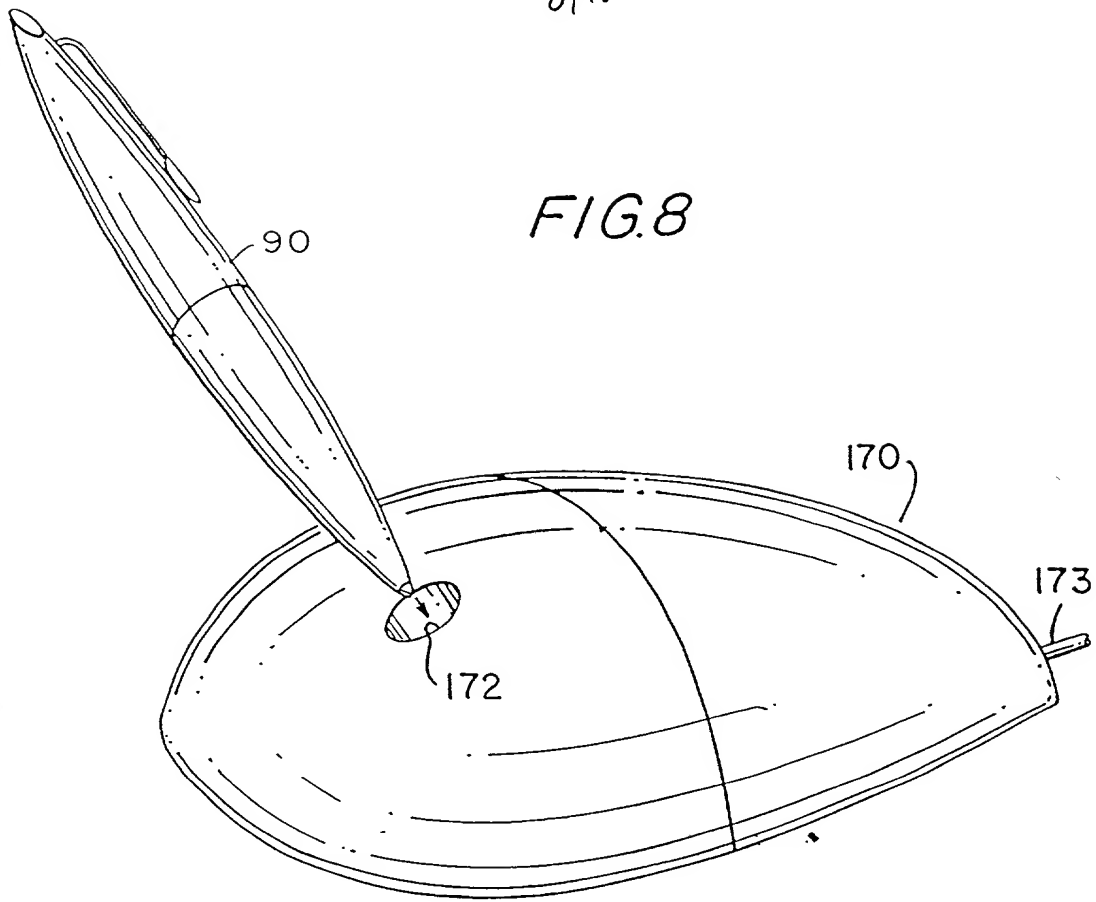


FIG. 9

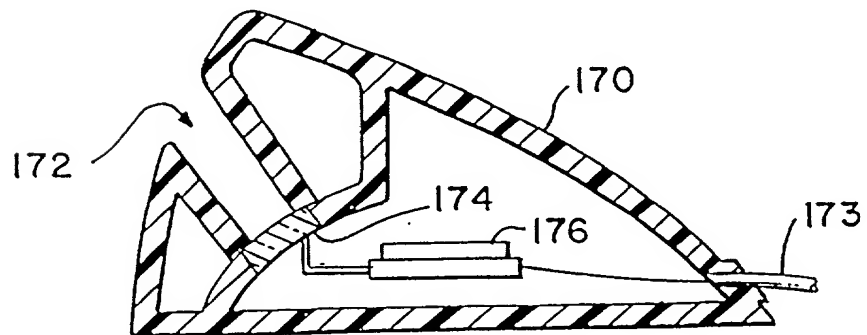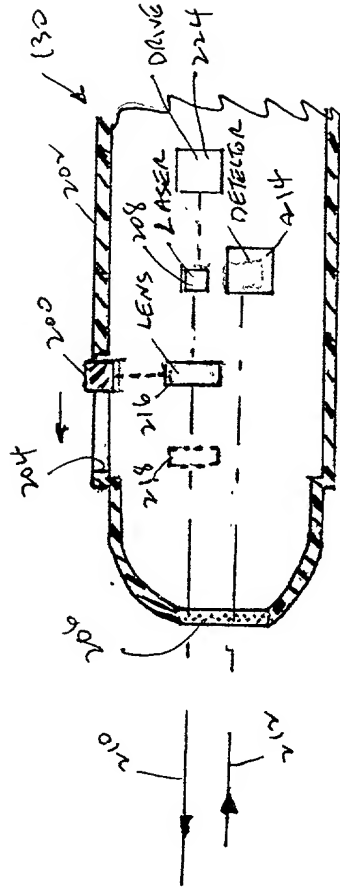

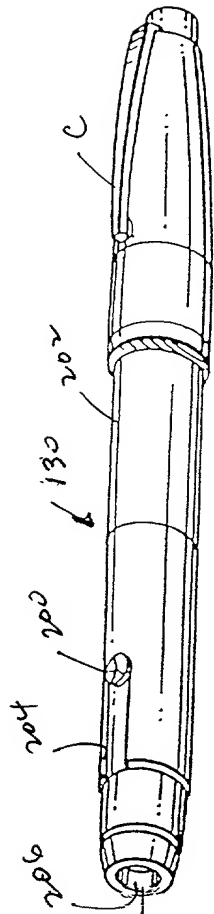

10/10

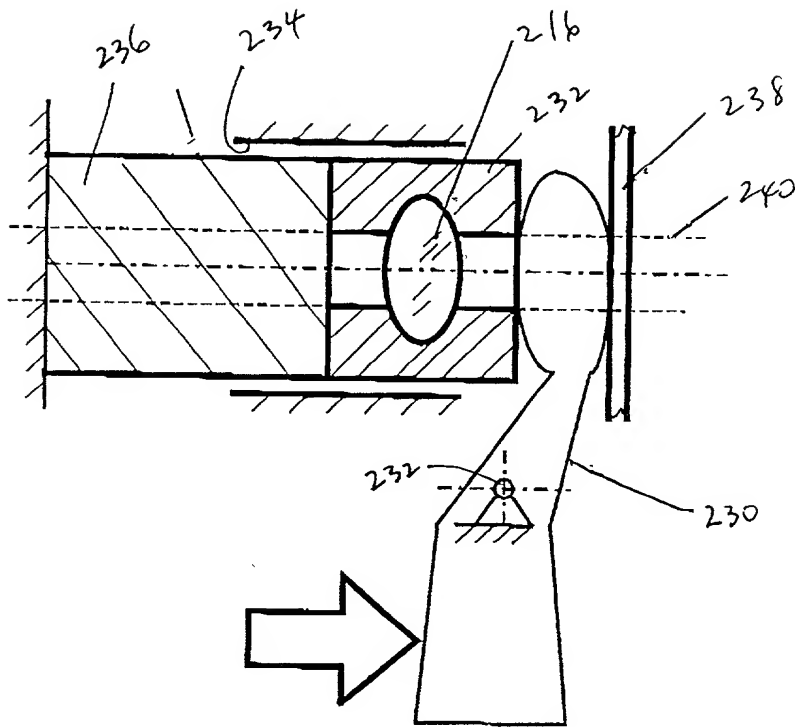


FIG. 12